

Purpose: The purpose of this document is to provide instructions for attaching an optional exterior ground wire to the coil cord of ED series cylinder controlled units

Scope: This document covers all ED series hoists equipped with a cylinder control.

Instructions:

1. Cut 225 inches of green 14 AWG Type MTW or equivalent cable.
2. Strip back .25 inches of wire from both ends.
3. Crimp one T&B B-87 ring terminal on each end of cable.
4. Attach one end of cable to the cylinder control housing as shown in figure 1.
5. Attach ground wire to coil cord as shown in figure 2 using T&B TY-RAP TY25MX cable ties.
6. Attach remaining end of cable to cable support L as shown in figure 3.

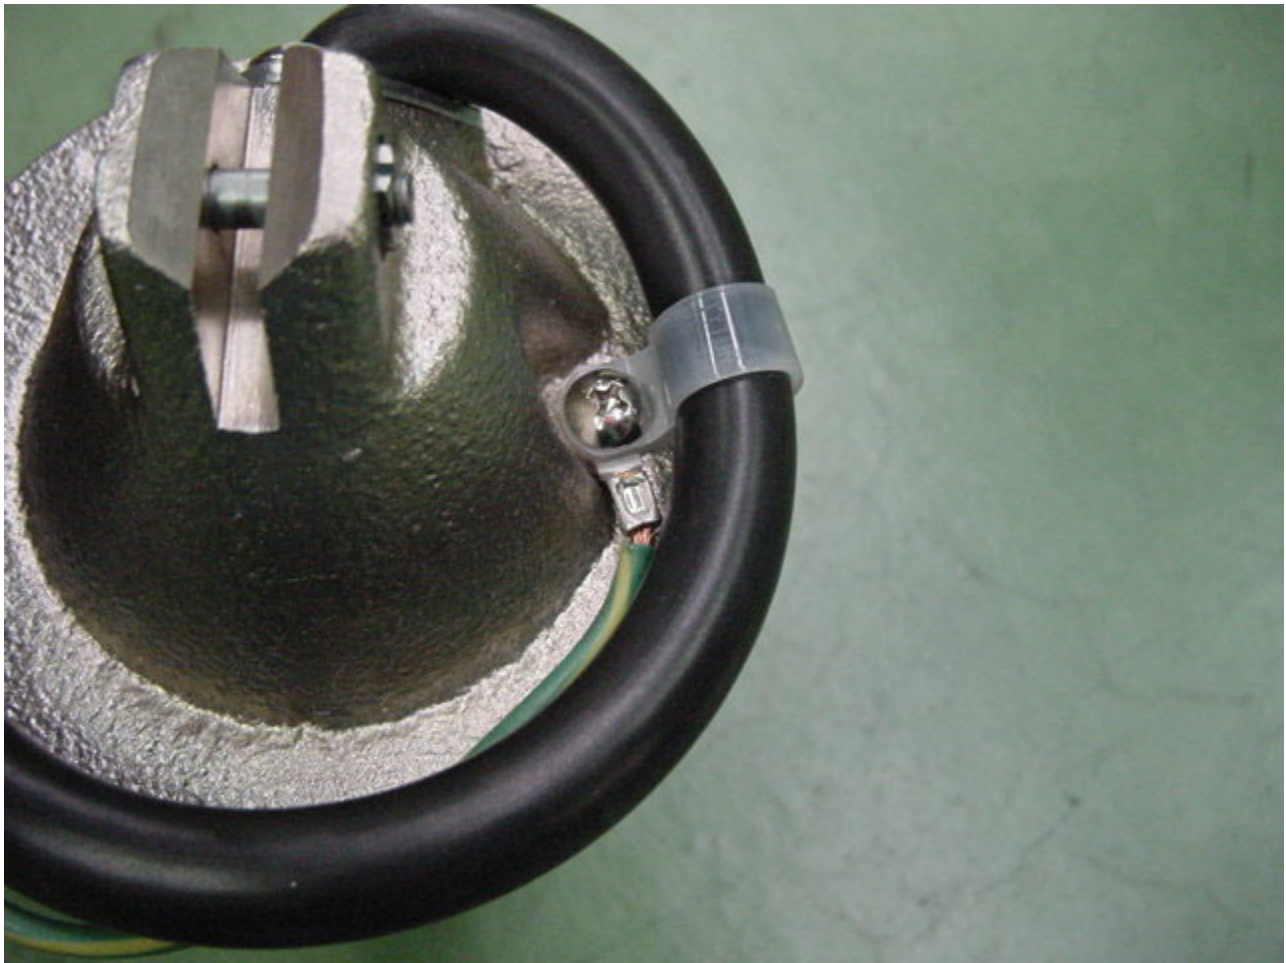


Figure 1



Figure 2



Figure 3

END