

PURPOSE

To provide specification and dimension information for the sling chain product line.


SCOPE

Grade 100 alloy steel sling chain in the following sizes: 9/32 inch (7mm), 3/8 inch (10mm) and 1/2 inch (13mm).

SPECIFICATIONS

- ASME B30.9, "Slings"
- NACM Welded Steel Chain Specifications
- ASTM A 906/A 906M, Standard Specification for Grade 80 and Grade 100 Alloy Steel Chain Slings for Overhead Lifting
- ASTM A 973/A 973M-01, Standard Specification for Grade 100 Alloy Steel Chain

DIMENSION

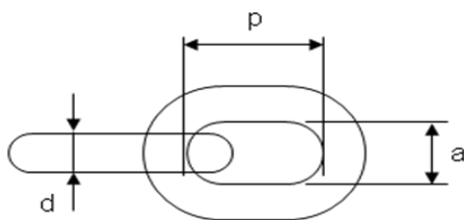

Nominal Ød in (mm)	p (pitch) in/mm	a (Minimum Inside Width) in (mm)	WLL (Working Load Limit) lb (kg)	MBF (Minimum Breaking Force) lbs (kN)	Weight lbs/foot (kg/m)
9/32 (7)	0.83 (21)	0.38 (9.6)	4,300 (1,950)	17,310 (77)	0.73 (1.09)
3/8 (10)	1.18 (30)	0.51 (13.0)	8,800 (4,000)	35,969 (160)	1.50 (2.23)
1/2 (13)	1.54 (39)	0.69 (17.5)	15,000 (6,800)	60,248 (268)	2.54 (3.78)

END